


FLANGE BEARING

法兰型轴承

■ MINIATURE TYPE / 微型

METRIC SERIES / 公制系列

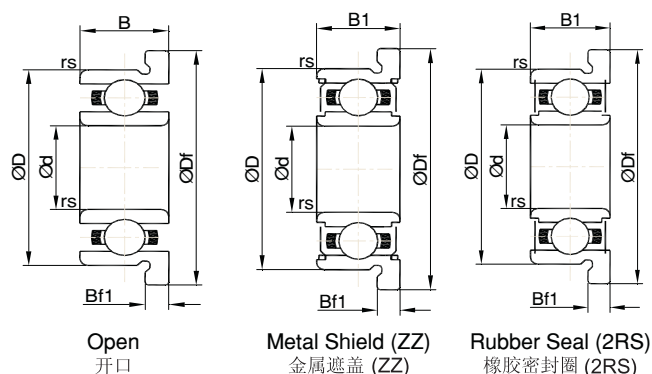

• Dimensions / 尺寸

Unit / 单位 : mm

Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
1	3	1.0	-	0.05	3.8	0.3	-	F681	-	-	9.8	2.7
	4	1.6	-	0.10	5	0.5	-	F691	-	-	14.4	3.8
1.2	4	1.8	-	0.10	4.8	0.4	-	MF41X	-	-	11.4	3.4
1.5	4	1.2	2.0	0.05	5	0.4	0.6	F681X	F681XZZ	F681X - 2RS	11.4	3.4
	5	2.0	2.6	0.15	6.5	0.6	0.8	F691X	F691XZZ	F691X - 2RS	17.2	5.1
	6	2.5	3.0	0.15	7.5	0.6	0.8	F601X	F601XZZ	F601X - 2RS	33.7	10.1
2	5	1.5	2.3	0.08	6.1	0.5	0.6	F682	F682ZZ	F682 - 2RS	17.2	5.1
	5	2.0	2.5	0.10	6.2	0.6	0.6	MF52	MF52ZZ	MF52 - 2RS	17.2	5.1
	6	2.3	3.0	0.15	7.5	0.6	0.8	F692	F692ZZ	F692 - 2RS	33.7	10.1
	6	2.5	-	0.15	7.2	0.6	-	MF62	-	-	33.7	10.1
	7	2.5	3.0	0.15	8.2	0.6	0.6	MF72	MF72ZZ	MF72 - 2RS	39.4	13.2
	7	2.8	3.5	0.15	8.5	0.7	0.9	F602	F602ZZ	F602 - 2RS	39.4	13.2
	7	2.8	3.5	0.15	8.5	0.7	0.9	F602	F602ZZ	F602 - 2RS	39.4	13.2
2.5	6	1.8	2.6	0.08	7.1	0.5	0.8	F682X	F682XZZ	F682X - 2RS	21.3	7.6
	7	2.5	3.5	0.15	8.5	0.7	0.9	F692X	F692XZZ	F692X - 2RS	39.4	13.2
	8	2.5	-	0.20	9.2	0.6	-	MF82X	-	-	56.9	18.4
	8	2.8	4.0	0.15	9.5	0.7	0.9	F602X	F602XZZ	F602X - 2RS	56.3	18.1
3	6	2.0	2.5	0.10	7.2	0.6	0.6	MF63	MF63ZZ	MF63 - 2RS	21.3	7.6
	7	2.0	3.0	0.10	8.1	0.5	0.8	F683	F683ZZ	F683 - 2RS	31.7	11.4
	8	2.5	3.0	0.15	9.2	0.6	-	MF83	-	-	40.3	14.4
	8	3.0	4.0	0.15	9.5	0.7	0.9	F693	F693ZZ	F693 - 2RS	56.9	18.4
	9	2.5	4.0	0.20	10.2	0.6	0.8	MF93	MF93ZZ	MF93 - 2RS	58.3	19.3
	9	3.0	5.0	0.15	10.5	0.7	1.0	F603	F603ZZ	F603 - 2RS	58.3	19.3
	10	4.0	4.0	0.15	11.5	1.0	1.0	F623	F623ZZ	F623 - 2RS	64.4	22.3
	13	5.0	5.0	0.20	-	-	-	F633	-	-	-	-
4	7	2.0	-	0.10	8.2	0.6	-	MF74	-	-	31.7	11.7
	7	-	2.5	0.10	8.2	-	0.6	-	MF74ZZS	MF74 - 2RS	26.0	11.0
	8	2.0	3.0	0.15	9.2	0.6	0.6	MF84	MF84ZZ	MF84 - 2RS	40.3	14.4
	9	2.5	4.0	0.10	10.3	0.6	1.0	F684	F684ZZ	F684 - 2RS	65.4	23.2
	10	3.0	4.0	0.20	11.2	0.6	0.8	MF104	MF104ZZ	MF104 - 2RS	72.6	27.8
	11	4.0	4.0	0.15	12.5	1.0	1.0	F694	F694ZZ	F694 - 2RS	97.7	35.7
	12	4.0	4.0	0.20	13.5	1.0	1.0	F604	F604ZZ	F604 - 2RS	97.7	35.7
	13	5.0	5.0	0.20	15	1.0	1.0	F624	F624ZZ	F624 - 2RS	132.8	49.8
	16	5.0	5.0	0.30	18	1.0	1.0	F634	F634ZZ	F634 - 2RS	136.7	53.4


• For Stainless Steel type, add SS in front of the part number.

不锈钢类型型号前需加SS。

FLANGE BEARING

法兰型轴承

■ MINIATURE TYPE / 微型 METRIC SERIES / 公制系列

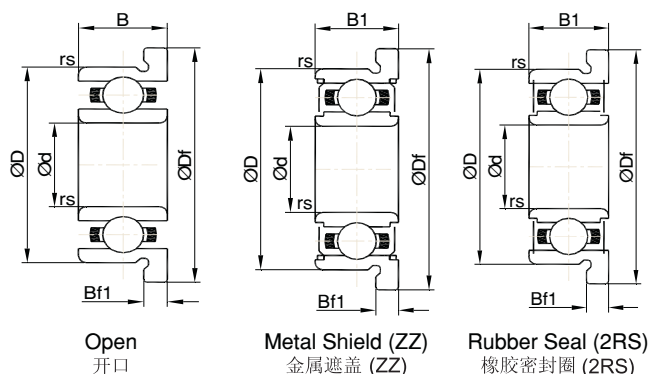

• Dimensions / 尺寸

Unit / 单位 : mm


Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
5	8	2.0	-	0.10	9.2	0.6	-	MF85	-	-	31.4	12.2
	8	-	2.5	0.10	9.2	-	0.6	-	MF85ZZS	MF85 - 2RS	22.2	9.2
	9	2.5	3.0	0.15	10.2	0.6	0.6	MF95	MF95ZZS	MF95 - 2RS	44.0	17.2
	10	3.0	4.0	0.15	11.2	0.6	0.8	MF105	MF105ZZ	MF105 - 2RS	44.0	17.2
	11	-	4.0	0.15	12.6	-	0.8	-	MF115ZZ	MF115 - 2RS	73.1	28.8
	11	3.0	5.0	0.15	12.5	0.8	1.0	F685	F685ZZ	F685 - 2RS	73.1	28.8
	13	4.0	4.0	0.20	15	1.0	1.0	F695	F695ZZ	F695 - 2RS	109.9	44.1
	14	5.0	5.0	0.20	16	1.0	1.0	F605	F605ZZ	F605 - 2RS	135.6	51.7
	16	5.0	5.0	0.30	18	1.0	1.0	F625	F625ZZ	F625 - 2RS	176.4	68.9
	19	6.0	6.0	0.30	22	1.5	1.5	F635	F635ZZ	F635 - 2RS	238.4	91.4
6	10	2.5	3.0	0.15	11.2	0.6	0.6	MF106	MF106ZZS	MF106 - 2RS	50.6	22.2
	12	3.0	4.0	0.20	13.2	0.6	0.8	MF126	MF126ZZ	MF126 - 2RS	72.9	30.1
	13	3.5	5.0	0.15	15	1.0	1.1	F686	F686ZZ	F686 - 2RS	110.4	45.1
	15	5.0	5.0	0.20	17	1.2	1.2	F696	F696ZZ	F696 - 2RS	136.7	53.4
	17	6.0	6.0	0.30	19	1.2	1.2	F606	F606ZZ	F606 - 2RS	230.9	86.3
	19	6.0	6.0	0.30	22	1.5	1.5	F626	F626ZZ	F626 - 2RS	238.4	91.4
7	11	2.5	3.0	0.15	12.2	0.6	0.6	MF117	MF117ZZS	MF117 - 2RS	46.4	20.6
	13	3.0	4.0	0.20	14.2	0.6	0.8	MF137	MF137ZZ	MF137 - 2RS	55.2	28.1
	14	3.5	5.0	0.15	16	1.0	1.1	F687	F687ZZ	F687 - 2RS	119.6	52.3
	17	5.0	5.0	0.30	19	1.2	1.2	F697	F697ZZ	F697 - 2RS	163.7	73.3
	19	6.0	6.0	0.30	22	1.5	1.5	F607	F607ZZ	F607 - 2RS	238.2	91.4
	22	7.0	7.0	0.30	25	1.5	1.5	F627	F627ZZ	F627 - 2RS	335.2	140.6
8	12	2.5	3.5	0.15	13.2	0.6	0.8	MF128	MF128ZZS	MF128 - 2RS	55.4	27.9
	14	3.5	4.0	0.20	15.6	0.8	0.8	MF148	MF148ZZ	MF148 - 2RS	83.3	39.4
	16	4.0	5.0	0.20	18	1.0	1.1	F688	F688ZZ	F688 - 2RS	127.7	60.4
	19	6.0	6.0	0.30	22	1.5	1.5	F698	F698ZZ	F698 - 2RS	228.1	93.5
	22	7.0	7.0	0.30	25	1.5	1.5	F608	F608ZZ	F608 - 2RS	335.8	140.6
9	14	3.0	4.5	0.10	15.5	0.8	0.8	F679	F679ZZ	F679 - 2RS	93.7	47.7
	17	4.0	5.0	0.20	19	1.0	1.1	F689	F689ZZ	F689 - 2RS	135.3	68.1
	20	6.0	6.0	0.30	23	1.5	1.5	F699	F699ZZ	F699 - 2RS	251.6	110.2
	24	7.0	7.0	0.30	27	1.5	1.5	F609	F609ZZ	F609 - 2RS	342.2	147.2

- For Stainless Steel type, add SS in front of the part number.
不锈钢类型型号前需加SS。

FLANGE BEARING

法兰型轴承

■ STANDARD TYPE / 标准型 METRIC SERIES / 公制系列

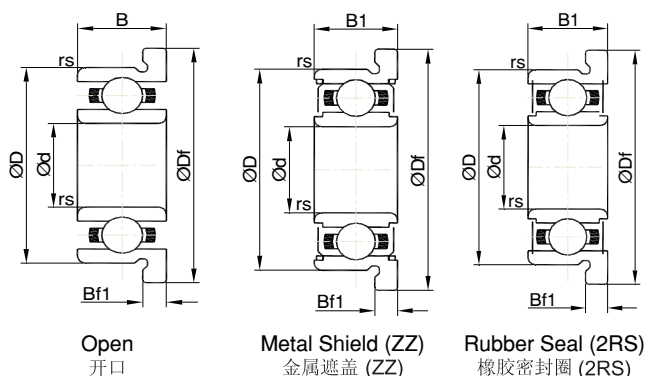

• Dimensions / 尺寸

Unit / 单位 : mm

Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
10	15	3.0	-	0.15	16.5	0.8	0.8	F6700	-	-	87.2	44.4
	15	-	4.0	0.15	16.5	0.8	0.8	-	F6700ZZS	F6700 - 2RS	87.2	44.4
	19	5.0	5.0	0.30	21	1.0	1.0	F6800	F6800ZZ	F6800 - 2RS	175.0	85.7
	19	7.0	7.0	0.30	21	1.5	1.5	F63800	F63800ZZ	F63800 - 2RS	175.0	85.7
	19	4.0	4.0	0.15	21	1.0	1.0	F6800W	F6800WZZ	F6800W - 2RS	87.2	44.4
	22	6.0	6.0	0.30	25	1.5	1.5	F6900	F6900ZZ	F6900 - 2RS	274.8	129.8
12	22	5.0	5.0	0.30	25	1.5	1.5	F6900W	F6900WZZ	F6900W - 2RS	175.0	85.7
	18	4.0	4.0	0.20	19.5	0.8	0.8	F6701	F6701ZZ	F6701 - 2RS	94.4	54.0
	21	5.0	5.0	0.30	23	1.1	1.1	F6801	F6801ZZ	F6801 - 2RS	195.3	106.2
	21	7.0	7.0	0.30	23	1.5	1.5	F63801	F63801ZZ	F63801 - 2RS	195.3	106.2
	21	4.0	4.0	0.30	23	1.1	1.1	F6801W	F6801WZZ	F6801W - 2RS	94.4	54.0
	24	6.0	6.0	0.30	26.5	1.5	1.5	F6901	F6901ZZ	F6901 - 2RS	294.3	149.5
15	24	5.0	5.0	0.30	26.5	1.5	1.5	F6901W	F6901WZZ	F6901W - 2RS	195.3	106.2
	21	4.0	4.0	0.20	22.5	0.8	0.8	F6702	F6702ZZ	F6702 - 2RS	95.5	59.3
	24	5.0	5.0	0.30	26	1.1	1.1	F6802	F6802ZZ	F6802 - 2RS	211.4	127.8
	24	7.0	7.0	0.30	26	1.5	1.5	F63802	F63802ZZ	F63802 - 2RS	211.4	127.8
	24	4.0	4.0	0.20	26	1.1	1.1	F6802W	F6802WZZ	F6802W - 2RS	95.5	59.3
	28	7.0	7.0	0.30	30.5	1.5	1.5	F6902	F6902ZZ	F6902 - 2RS	440.6	230.4
17	28	5.0	5.0	0.30	30.5	1.5	1.5	F6902W	F6902WZZ	F6902W - 2RS	211.4	127.8
	23	4.0	4.0	0.20	24.5	0.8	0.8	F6703	F6703ZZ	F6703 - 2RS	102.0	67.1
	26	5.0	5.0	0.30	28	1.1	1.1	F6803	F6803ZZ	F6803 - 2RS	227.7	148.5
	26	7.0	7.0	0.30	28	1.5	1.5	F63803	F63803ZZ	F63803 - 2RS	227.7	148.5
	26	4.0	4.0	0.20	28	1.1	1.1	F6803W	F6803WZZ	F6803W - 2RS	102.0	67.1
	30	7.0	7.0	0.30	32.5	1.5	1.5	F6903	F6903ZZ	F6903 - 2RS	467.8	261.6
	30	5.0	5.0	0.30	32.5	1.5	1.5	F6903W	F6903WZZ	F6903W - 2RS	227.7	148.5


- For Stainless Steel type, add SS in front of the part number.

不锈钢类型型号前需加SS。

FLANGE BEARING

法兰型轴承

■ STANDARD TYPE / 标准型 METRIC SERIES / 公制系列

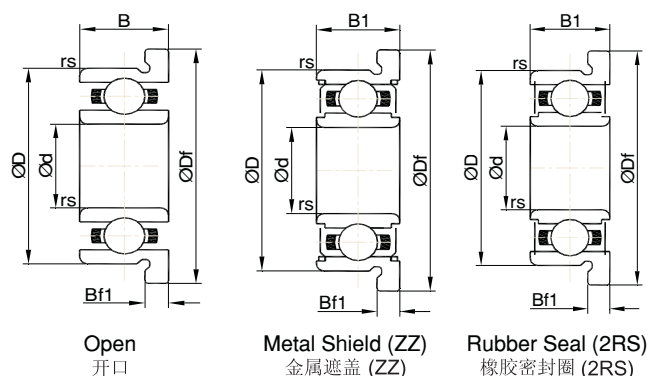

• Dimensions / 尺寸

Unit / 单位 : mm

Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
20	27	4.0	4.0	0.20	28.5	0.8	0.8	F6704	F6704ZZ	F6704 - 2RS	143.0	74.3
	32	7.0	7.0	0.30	35	1.5	1.5	F6804	F6804ZZ	F6804 - 2RS	409.4	251.1
	32	10.0	10.0	0.30	35	2.0	2.0	F63804	F63804ZZ	F63804 - 2RS	409.4	251.1
	32	4.0	4.0	0.30	35	1.5	1.5	F6804W	F6804WZZ	F6804W - 2RS	143.0	74.3
	37	9.0	9.0	0.30	40	2.0	2.0	F6904	F6904ZZ	F6904 - 2RS	650.7	375.5
	37	7.0	7.0	0.30	40	2.0	2.0	F6904W	F6904WZZ	F6904W - 2RS	409.4	251.1
25	32	4.0	4.0	0.20	34	1.0	1.0	F6705	F6705ZZ	F6705 - 2RS	111.3	85.5
	37	7.0	7.0	0.30	40	1.5	1.5	F6805	F6805ZZ	F6805 - 2RS	438.8	299.0
	37	10.0	10.0	0.30	40	2.0	2.0	F63805	F63805ZZ	F63805 - 2RS	438.8	299.0
	37	4.0	4.0	0.30	40	1.5	1.5	F6805W	F6805WZZ	F6805W - 2RS	111.3	85.5
	42	9.0	9.0	0.30	45	2.0	2.0	F6905	F6905ZZ	F6905 - 2RS	713.9	463.0
	42	7.0	7.0	0.30	45	2.0	2.0	F6905W	F6905WZZ	F6905W - 2RS	438.8	299.0
30	37	4.0	4.0	0.20	39	1.0	1.0	F6706	F6706ZZ	F6705 - 2RS	116.6	96.6
	42	7.0	7.0	0.30	45	1.5	1.5	F6806	F6806ZZ	F6806 - 2RS	462.7	346.9
	42	10.0	10.0	0.30	45	2.0	2.0	F63806	F63806ZZ	F63806 - 2RS	462.7	346.9
	42	4.0	4.0	0.30	45	1.5	1.5	F6806W	F6806WZZ	F6806W - 2RS	116.6	96.6
	47	9.0	9.0	0.30	50	2.0	2.0	F6906	F6906ZZ	F6906 - 2RS	738.5	510.2
	47	7.0	7.0	0.30	50	2.0	2.0	F6906W	F6906WZZ	F6906W - 2RS	462.7	346.9
35	47	7.0	7.0	0.30	50	1.5	1.5	F6807	F6807ZZ	F6807 - 2RS	482.2	389.6
	55	10.0	10.0	0.60	58	2.5	2.5	F6907	F6907ZZ	F6907 - 2RS	1,111.5	797.2
40	52	7.0	7.0	0.30	55	1.5	1.5	F6808	F6808ZZ	F6808 - 2RS	502.0	426.0
	62	12.0	12.0	0.60	65	2.5	2.5	F6908	F6908ZZ	F6908 - 2RS	1,394.8	1,016.5
45	58	7.0	7.0	0.30	61	1.5	1.5	F6809	F6809ZZ	F6809 - 2RS	630.9	548.7
	68	12.0	12.0	0.60	71	2.5	2.5	F6909	F6909ZZ	F6909 - 2RS	1,437.8	1,104.4


• For Stainless Steel type, add SS in front of the part number.

不锈钢类型型号前需加SS。

FLANGE BEARING

法兰型轴承

■ INCH SERIES / 英制系列 METRIC DIMENSIONS / 公制尺寸

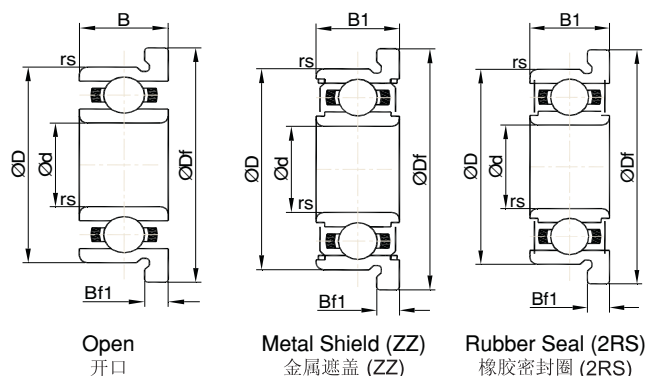

• Dimensions / 尺寸

Unit / 单位 : mm

Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
1.191	3.967	1.588	2.380	0.10	5.516	0.330	0.787	FR0	FR0ZZ	FR0 - 2RS	11.4	3.7
1.397	4.762	1.984	2.779	0.10	5.944	0.584	0.787	FR1	FR1ZZ	FR1 - 2RS	23.7	6.8
1.984	6.350	2.380	3.571	0.10	7.518	0.584	0.787	FR1 - 4	FR1 - 4ZZS	FR1 - 4 - 2RS	29.0	9.8
2.380	4.762	1.588	-	0.10	5.944	0.457	-	FR133	-	-	19.3	6.1
	4.762	-	2.380	0.10	5.944	-	0.787	-	FR133ZZS	FR133 - 2RS	14.7	5.4
	7.938	2.779	3.571	0.15	9.119	0.584	0.787	FR1 - 5	FR1 - 5ZZS	FR1 - 5 - 2RS	56.3	17.9
3.175	6.350	2.380	2.779	0.10	7.518	0.584	0.787	FR144J	FR144JZZS	FR144J - 2RS	31.7	11.2
	6.350	2.380	2.779	0.10	7.518	0.584	0.787	FR144	FR144ZZS	FR144 - 2RS	29.0	9.8
	7.938	2.779	3.571	0.10	9.119	0.584	0.787	FR2 - 5	FR2 - 5ZZ	FR2 - 5 - 2RS	56.9	18.4
	9.525	2.779	3.571	0.15	10.719	0.584	0.787	FR2 - 6	FR2 - 6ZZ	FR2 - 6 - 2RS	65.3	23.1
	9.525	3.967	3.967	0.30	11.176	0.762	0.762	FR2	FR2ZZ	FR2 - 2RS	64.3	22.3
	12.70	4.366	4.366	0.30	-	-	-	FR2A	FR2AZZ	FR2A - 2RS	64.0	22.7
3.967	7.938	2.779	3.175	0.10	9.119	0.584	0.914	FR155	FR155ZZS	FR155 - 2RS	36.6	15.3
4.762	7.938	2.779	3.175	0.10	9.119	0.584	0.914	FR156	FR156ZZS	FR156 - 2RS	36.6	15.3
	9.525	3.175	3.175	0.10	10.719	0.584	0.787	FR166	FR166ZZ	FR166 - 2RS	72.3	27.7
	12.70	3.967	4.978	0.30	14.351	1.067	1.067	FR3	FR3ZZ	FR3 - 2RS	132.7	49.8
	15.88	4.978	4.978	0.30	-	-	-	FR3A	FR3AZZ	FR3A - 2RS	148.0	62.1
6.350	9.525	3.175	3.175	0.10	10.719	0.584	0.914	FR168	FR168ZZS	FR168 - 2RS	38.0	17.5
	12.70	3.175	4.762	0.15	13.894	0.584	1.143	FR188	FR188ZZ	FR188 - 2RS	110.3	45.1
	15.88	4.978	4.978	0.30	17.526	1.067	1.067	FR4	FR4ZZ	FR4 - 2RS	150.9	63.3
	19.05	5.558	7.142	0.40	-	-	-	FR4A	FR4AZZ	FR4A - 2RS	233.6	89.6
7.938	12.70	3.967	3.967	0.15	13.894	0.787	0.787	FR1810	FR1810ZZS	FR1810 - 2RS	55.3	28.1
9.525	22.23	5.558	7.142	0.40	24.623	1.575	1.575	FR6	FR6ZZ	FR6 - 2RS	339.8	145.0
12.70	28.58	6.350	7.938	0.40	31.120	1.575	1.575	FR8	FR8ZZ	FR8 - 2RS	520.9	246.1
15.88	34.93	7.142	8.733	0.80	-	-	-	-	FR10ZZ	FR10 - 2RS	598.8	328.7


- For Stainless Steel type, add SS in front of the part number.
不锈钢类型型号前需加SS。

FLANGE BEARING

法兰型轴承

■ INCH SERIES / 英制系列

INCH SERIES / 英制尺寸

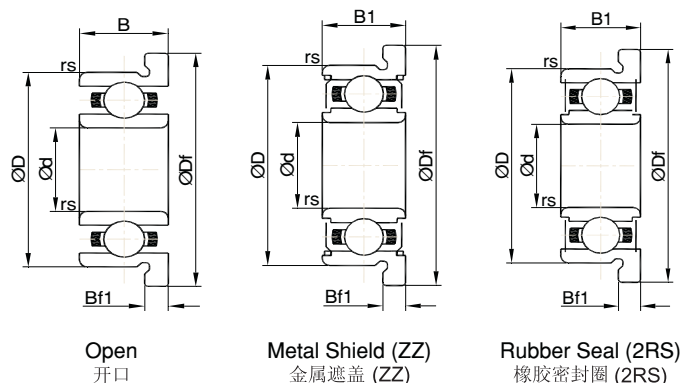

• Dimensions / 尺寸

Unit / 单位 : inch

Boundary Dimensions 边界尺寸								Bearing Number 轴承号码			Basic Load Rating 基本负载等级	
d	D	B	B1	rs	Df	Bf	Bf1	Open 开口	Metal Shield (ZZ) 金属遮盖 (ZZ)	Rubber Seal (2RS) 橡胶密封圈 (2RS)	Cr (kgf)	Cor (kgf)
0.0469	0.1562	0.0625	0.0937	0.0039	0.2030	0.0130	0.0310	FR0	FR0ZZ	FR0 - 2RS	11.4	3.7
0.0550	0.1875	0.0781	0.1094	0.0039	0.2340	0.0230	0.0310	FR1	FR1ZZ	FR1 - 2RS	23.7	6.8
0.0781	0.2500	0.0937	0.1406	0.0039	0.2960	0.0230	0.0310	FR1 - 4	FR1 - 4ZZS	FR1 - 4 - 2RS	29.0	9.8
0.0937	0.1875	0.0625	-	0.0039	0.2340	0.0180	-	FR133	-	-	19.3	6.1
	0.1875	-	0.0937	0.0039	0.2340	-	0.0310	-	FR133ZZS	FR133 - 2RS	14.7	5.4
	0.3125	0.1094	0.1406	0.0059	0.3590	0.0230	0.0310	FR1 - 5	FR1 - 5ZZS	FR1 - 5 - 2RS	56.3	17.9
0.1250	0.2500	0.0937	0.1094	0.0039	0.2960	0.0230	0.0310	FR144J	FR144JZZS	FR144J - 2RS	31.7	11.2
	0.2500	0.0937	0.1094	0.0039	0.2960	0.0230	0.0310	FR144	FR144ZZS	FR144 - 2RS	29.0	9.8
	0.3125	0.1094	0.1406	0.0039	0.3590	0.0230	0.0310	FR2 - 5	FR2 - 5ZZ	FR2 - 5 - 2RS	56.9	18.4
	0.3750	0.1094	0.1406	0.1094	0.4220	0.0230	0.0310	FR2 - 6	FR2 - 6ZZ	FR2 - 6 - 2RS	65.3	23.1
	0.3750	0.1562	0.1562	0.0118	0.4400	0.0300	0.0300	FR2	FR2ZZ	FR2 - 2RS	64.3	22.3
	0.5000	0.1719	0.1719	0.0118	-	-	-	FR2A	FR2AZZ	FR2A - 2RS	64.0	22.7
0.1562	0.3125	0.1094	0.1250	0.0039	0.3590	0.0230	0.0360	FR155	FR155ZZS	FR155 - 2RS	36.6	15.3
0.1875	0.3125	0.1094	0.1250	0.0039	0.3590	0.0230	0.0360	FR156	FR156ZZS	FR156 - 2RS	36.6	15.3
	0.3750	0.1250	0.1250	0.0039	0.4220	0.0230	0.0310	FR166	FR166ZZ	FR166 - 2RS	72.3	27.7
	0.5000	0.1562	0.1960	0.0118	0.5650	0.0420	0.0420	FR3	FR3ZZ	FR3 - 2RS	132.7	49.8
	0.6252	0.1960	0.1960	0.0118	-	-	-	FR3A	FR3AZZ	FR3A - 2RS	148.0	62.1
0.2500	0.3750	0.1250	0.1250	0.0039	0.4220	0.0230	0.0360	FR168	FR168ZZS	FR168 - 2RS	38.0	17.5
	0.5000	0.1250	0.1875	0.0059	0.5470	0.0230	0.0450	FR188	FR188ZZ	FR188 - 2RS	110.3	45.1
	0.6252	0.1960	0.1960	0.0118	0.6900	0.0420	0.0420	FR4	FR4ZZ	FR4 - 2RS	150.9	63.3
	0.7500	0.2188	0.2812	0.0157	-	-	-	FR4A	FR4AZZ	FR4A - 2RS	233.6	89.6
0.3125	0.5000	0.1562	0.1562	0.0059	0.5470	0.0310	0.0130	FR1810	FR1810ZZS	FR1810 - 2RS	55.3	28.1
0.3750	0.8750	0.2188	0.2812	0.0157	0.9690	0.0620	0.0620	FR6	FR6ZZ	FR6 - 2RS	339.8	145.0
0.5000	1.1250	0.2500	0.3125	0.0157	1.2252	0.0620	0.0620	FR8	FR8ZZ	FR8 - 2RS	520.9	246.1
0.6252	1.3752	0.2812	0.3438	0.0315	-	-	-	-	FR10ZZ	FR10 - 2RS	598.8	328.7

• For Stainless Steel type, add SS in front of the part number.

不锈钢类型型号前需加SS。